


외형자료

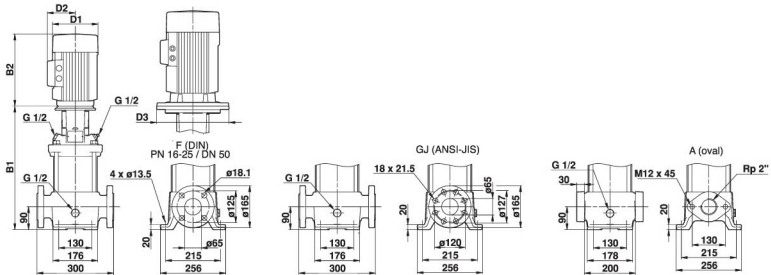

치수 / 중량

Pump type	Motor P ₂ [kW]	CR									CRE								
		Dimension [mm]						Net weight [kg]			Dimension [mm]					Net weight [kg]			
		Oval flange		DIN flange		D1	D2	D3	Oval flange	DIN flange	Oval flange		DIN flange		D1	D2	D3	Oval flange	DIN flange
		B1	B1+B2	B1	B1+B2						B1	B1+B2	B1	B1+B2					
CR(E) 20-1	2.2	415	736	415	736	178	110	-	49	50	415	736	415	736	178	167	-	59	60
CR(E) 20-2	4	420	792	420	792	220	134	-	64	65	420	792	420	792	220	188	-	74	75
CR(E) 20-3	5.5	497	888	497	888	220	134	300	86	87	497	888	497	888	220	188	298	93	93
CR(E) 20-4	7.5	542	933	542	933	220	134	300	89	90	542	933	542	933	220	188	298	97	98
CR 20-5	11	664	1163	664	1163	260	172	350	121	122	-	-	-	-	-	-	-	-	-
CR(E) 20-6	11	-	-	709	1208	260	172	350	-	124	-	-	724	1173	258	359	350	-	191
CR 20-7	15	-	-	754	1232	320	197	350	-	139	-	-	-	-	-	-	-	-	-
CR(E) 20-8	15	-	-	799	1277	320	197	350	-	141	-	-	814	1275	313	377	350	-	212
CR(E) 20-10	18.5	-	-	889	1407	320	197	350	-	175	-	-	904	1403	313	377	350	-	251

★ CR 20-2의 경우 3.7kW(교류용 모터) 장착 가능 - 장착 시 B2=372, D1=220, D2=134